

Image shown above 21.3 with round canopy

Series	21
Mounting	Ceiling mounted
Glass Colour	White
Lamp	1W LED, 2700K, 100lm (2500K and 3000K options available) 20W Xenon, 2600K, 196lm
Coaxial Length	3000mm standard / up to 30500mm maximum Adjustable length: 21.1 - 21.7 Non-adjustable length: 21.11 - 21.50
Canopy Finish	21.1 - 21.7: white, black or brushed nickel canopy 21.1m: white, black, brushed nickel, or brushed brass canopy 21.11 - 21.50: white canopy
Material	Porcelain, blown borosilicate glass, braided metal coaxial cable, electrical components, steel canopy
Power Supply	Integral Remote mounted for 21.1m Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP30
Note	Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	Worldwide patents issued and pending.
Certifications	



CB

C

CE

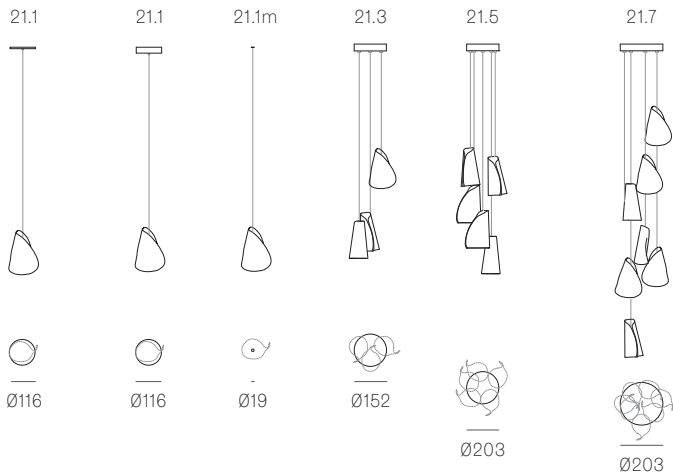
UK

CA

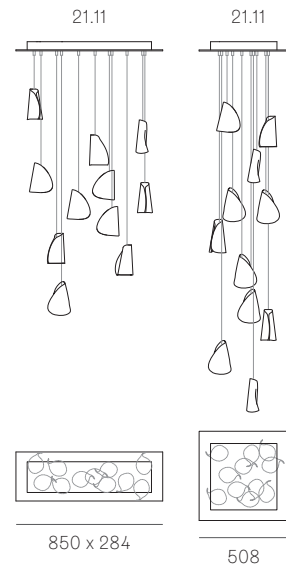


Weight (kg)			
			
Round		Square	
21.1	0.5	21.11	16.1
21.3	1.8	21.26	25
21.5	3	21.36	32.5
21.7	4.1	21.50	37.3
21.14	17.7		
21.26	25		
21.36	28		
21.37	26.8		
			
		Rectangle	
		21.11	16.1
		21.14	17.7
		21.21	18.6
		21.26	25
		21.36	28.4

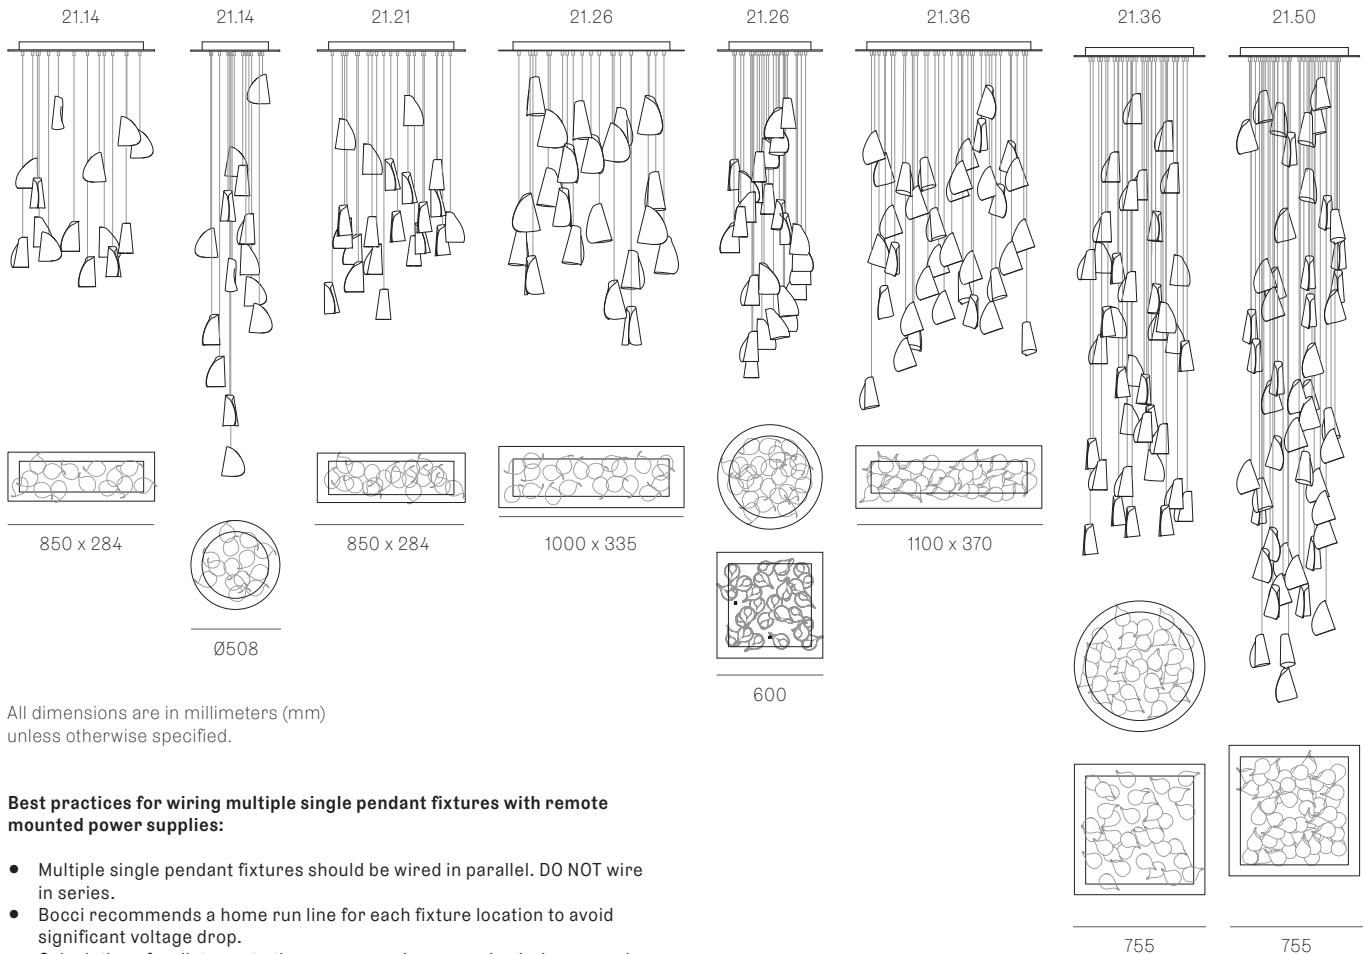
ADJUSTABLE LENGTH



NON-ADJUSTABLE LENGTH

up to 3000
standardup to 30500
custom

NON-ADJUSTABLE LENGTH

up to 3000
standardup to 30500
custom

All dimensions are in millimeters (mm)
unless otherwise specified.

**Best practices for wiring multiple single pendant fixtures with remote
mounted power supplies:**

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.