


Image shown above 118.11 with round canopy

± Ø130 - 146mm

|                 |                                                                                                                                                                                                                                          |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Series          | 118                                                                                                                                                                                                                                      |
| Mounting        | Ceiling mounted                                                                                                                                                                                                                          |
| Glass Colours   | White or bronze                                                                                                                                                                                                                          |
| Lamp            | 1W LED, 2700K, 100lm (2500K and 3000K options available)                                                                                                                                                                                 |
| Coaxial Length  | 3000mm standard / up to 30500mm maximum<br>Adjustable length: 118.1 - 118.9<br>Non-adjustable length: 118.11 - 118.28                                                                                                                    |
| Canopy Finishes | 118.1 - 118.7: white, black or brushed nickel canopy<br>118.1m: white, black, brushed nickel, or brushed brass canopy<br>118.9 - 118.28: white canopy                                                                                    |
| Materials       | Blown glass, braided metal coaxial cable, electrical components, steel canopy                                                                                                                                                            |
| Power Supply    | Integral<br>Remote mounted for 118.1m<br><br>Bocci recommends remote mounting power supplies for ease of long-term maintenance.                                                                                                          |
| Environment     | Indoor, dry location. IP30                                                                                                                                                                                                               |
| Note            | Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research. |
| Patent #        | US 12,668,520<br>Worldwide patents pending                                                                                                                                                                                               |

Certifications

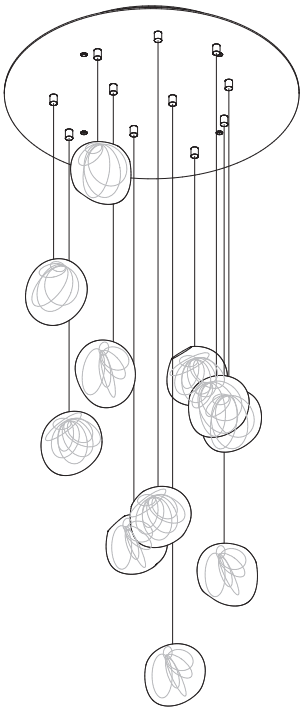

CB

C

CE

UK

CA



Weight (kg)



Round

|        |      |
|--------|------|
| 118.1  | 3.3  |
| 118.3  | 9.7  |
| 118.5  | 16.1 |
| 118.7  | 22.4 |
| 118.11 | 42.7 |
| 118.20 | 76.5 |



Square


|        |      |
|--------|------|
| 118.11 | 42.7 |
| 118.16 | 62.5 |
| 118.28 | 102  |




Rectangle

|        |      |
|--------|------|
| 118.9  | 33.7 |
| 118.11 | 42.7 |
| 118.16 | 62.5 |
| 118.20 | 76.5 |
| 118.28 | 102  |


ADJUSTABLE LENGTH

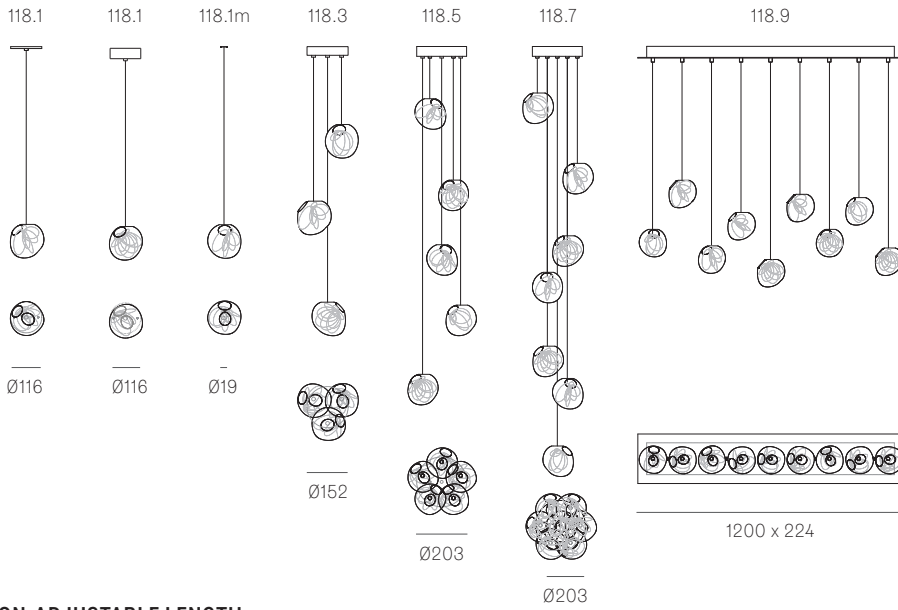

NON-ADJUSTABLE LENGTH

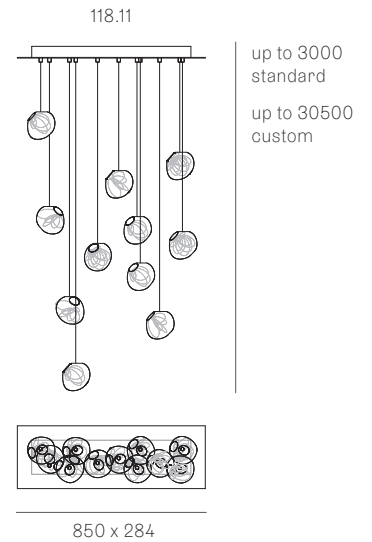

NON-ADJUSTABLE LENGTH

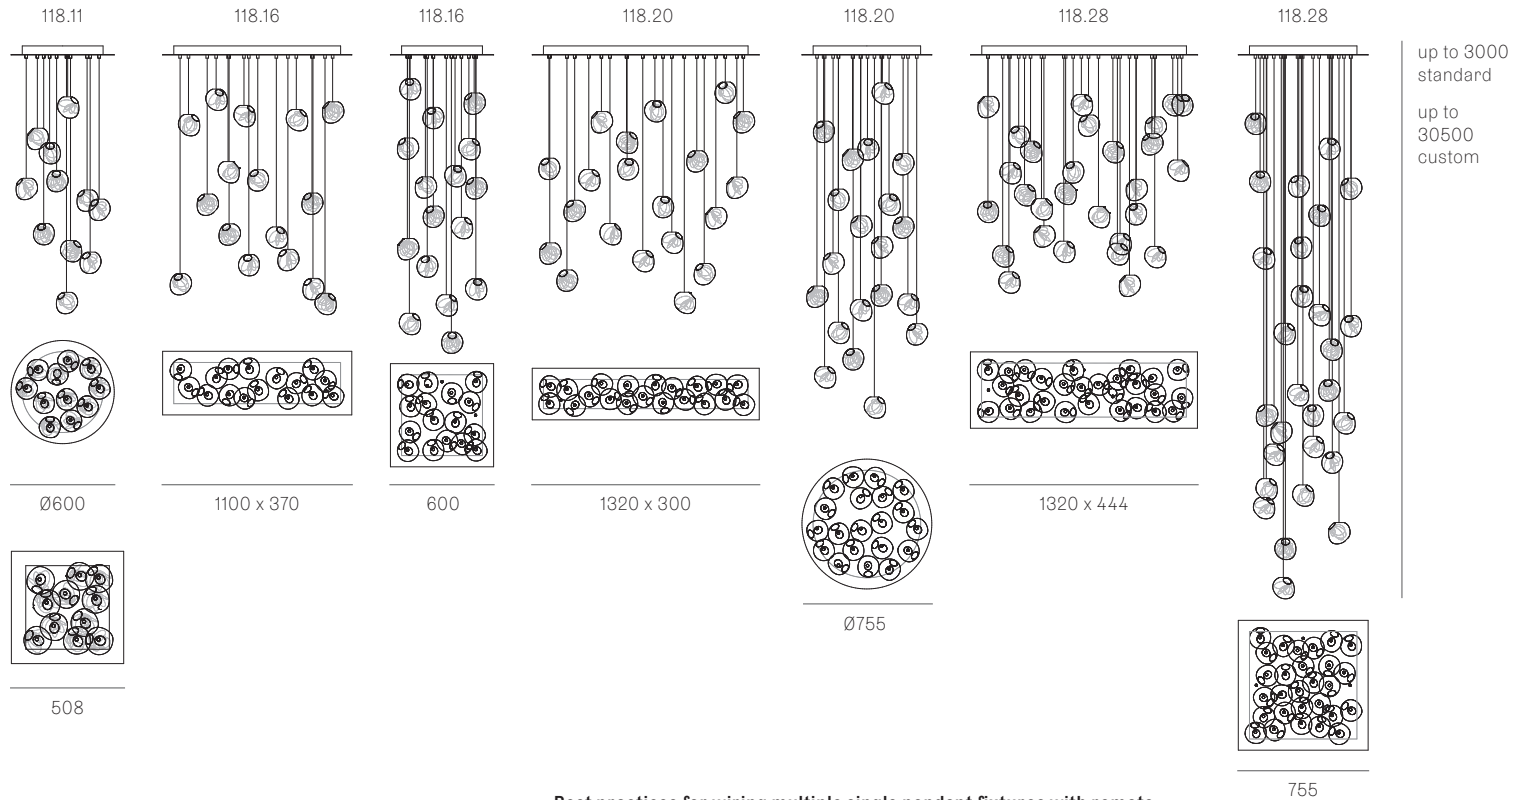

Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.

All dimensions are in millimeters (mm) unless otherwise specified.