


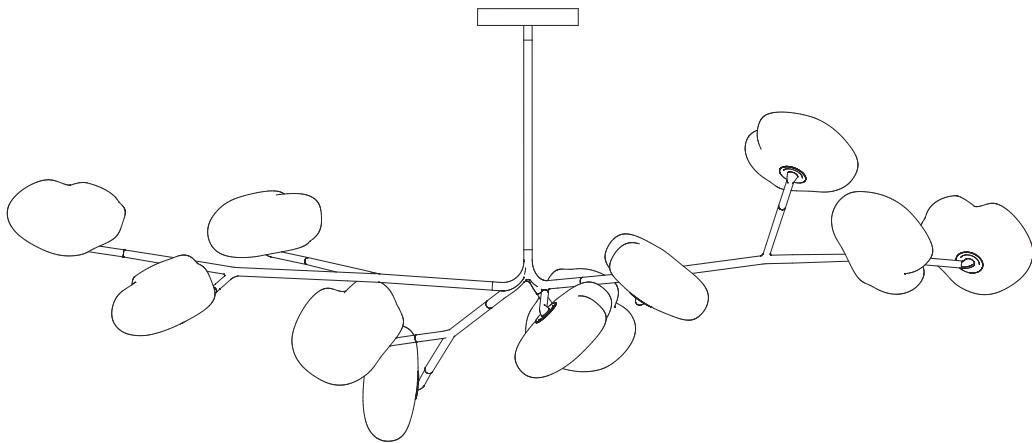

± 120 -
150mm

Image shown above 73.11a.1, 500mm extender

± 230 - 380mm

Mounting	Ceiling mounted
Glass Colours	Clear, grey 1, grey 2, grey 3
Lamp	1W LED, 2700K, 100lm (2500K and 3000K options available)
Extenders	Available in 150mm, 250mm, 500mm, 1200mm. Up to 2500mm drop.
Finish	Black powder coated
Materials	Blown glass, black powder coated stainless steel armature, electrical components, matte black canopy
Power Supply	Integral Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP20
Note	Optional levelling pendant anchor kit included. Every single Bocci product is handmade. They are blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	US D762,323 S EU 002633230-0001 - 0003

Certifications





Weight (kg)	
73.5a.1	21.4
73.8a.1	33.6
73.8a.2	35.2
73.9a.1	39.1
73.9a.2	37.3
73.11a.1	48.6
73.11a.2	46.7
73.13a.1	55.1
73.17a.1	70.8
73.21a.1	63.2
73.26a.1	76



Each product is unique,
there may be a variance
in the weight up to 10%.

73.5A.1

All dimensions are in millimeters (mm) unless otherwise specified.

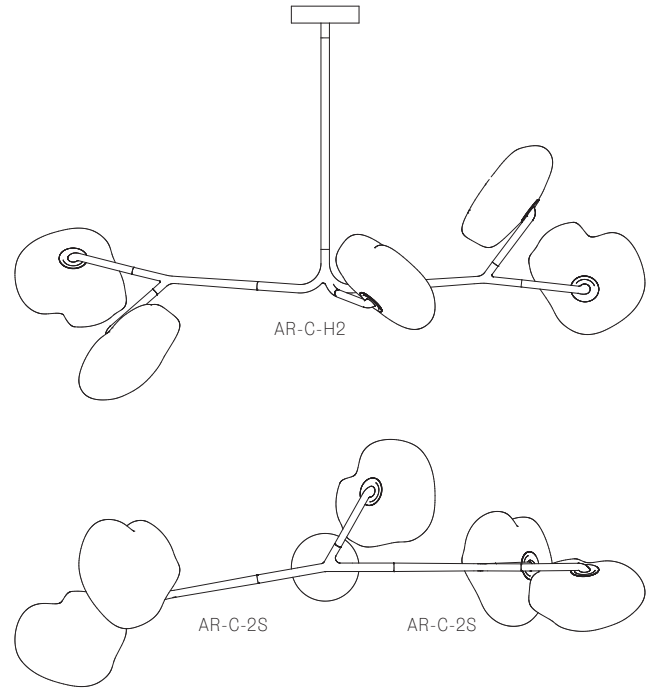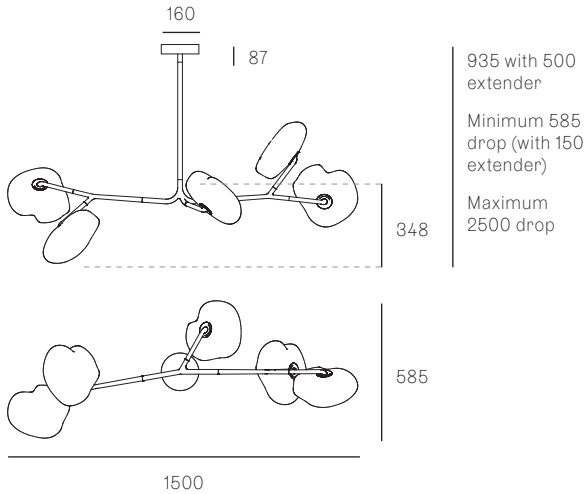


73.8A.1

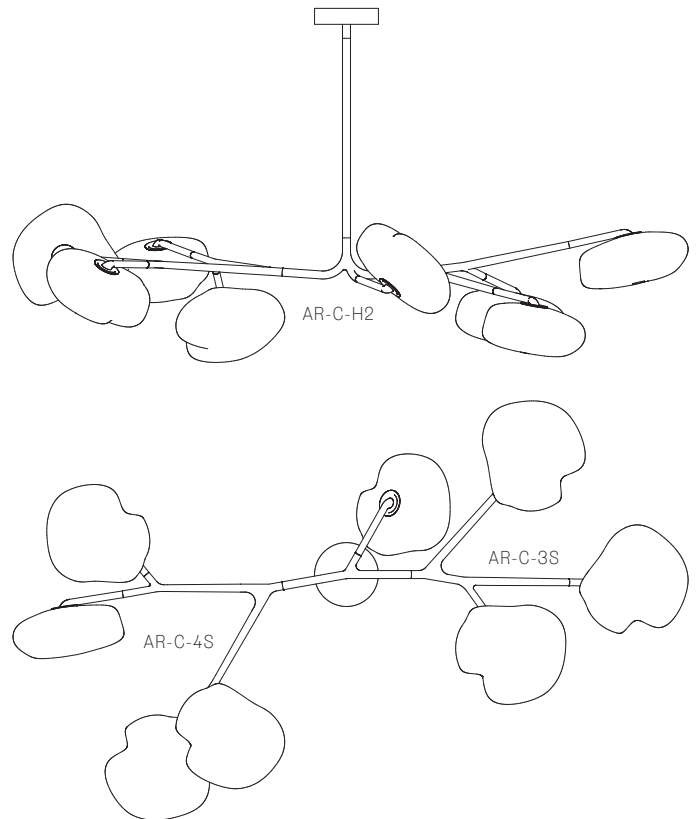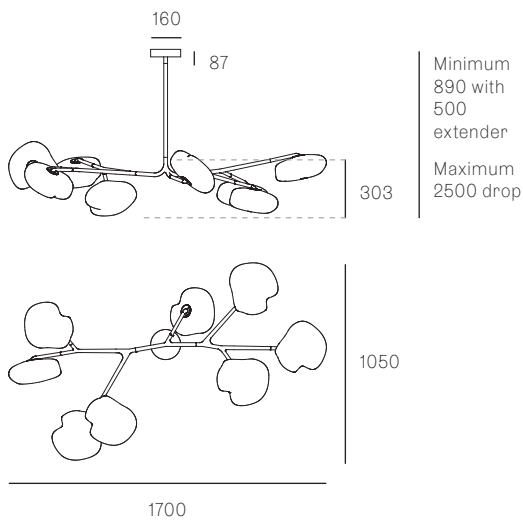


73.8A.2


All dimensions are in millimeters (mm) unless otherwise specified.

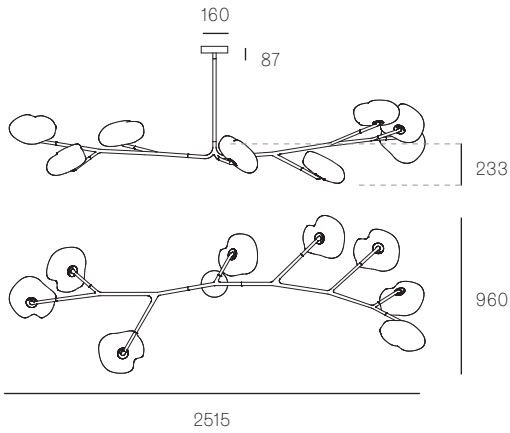


Minimum
820 with
500
extender
Maximum
2500 drop

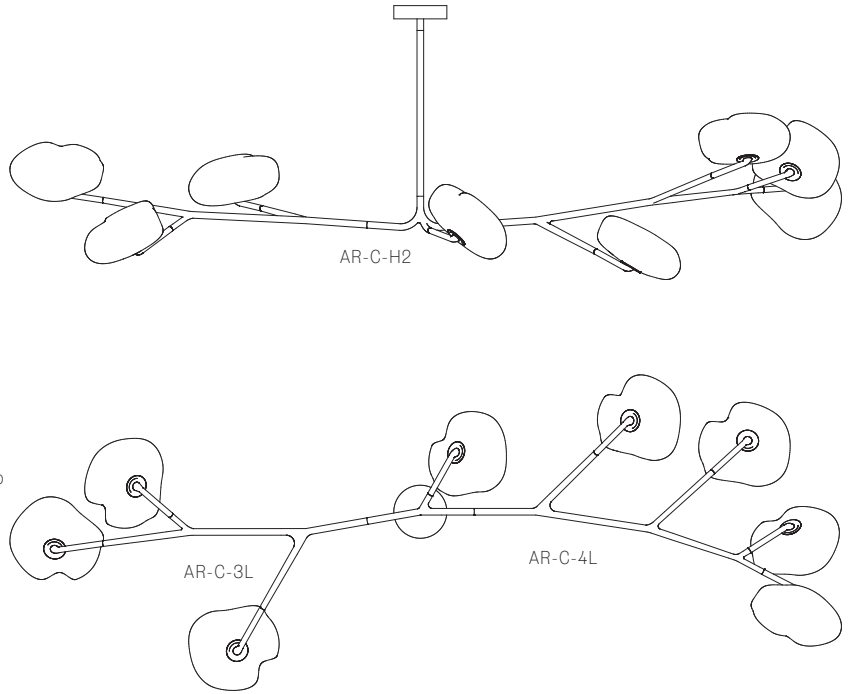

73.9A.1


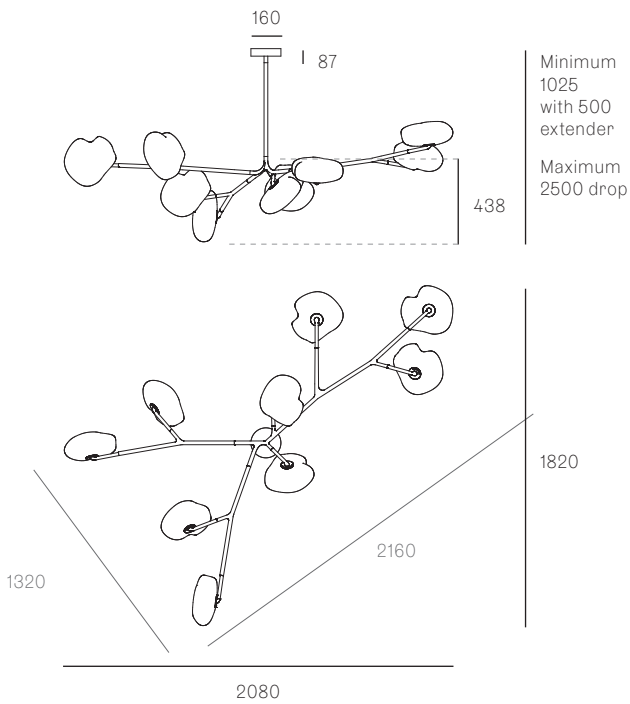


Minimum
1025
with 500
extender
Maximum
2500 drop


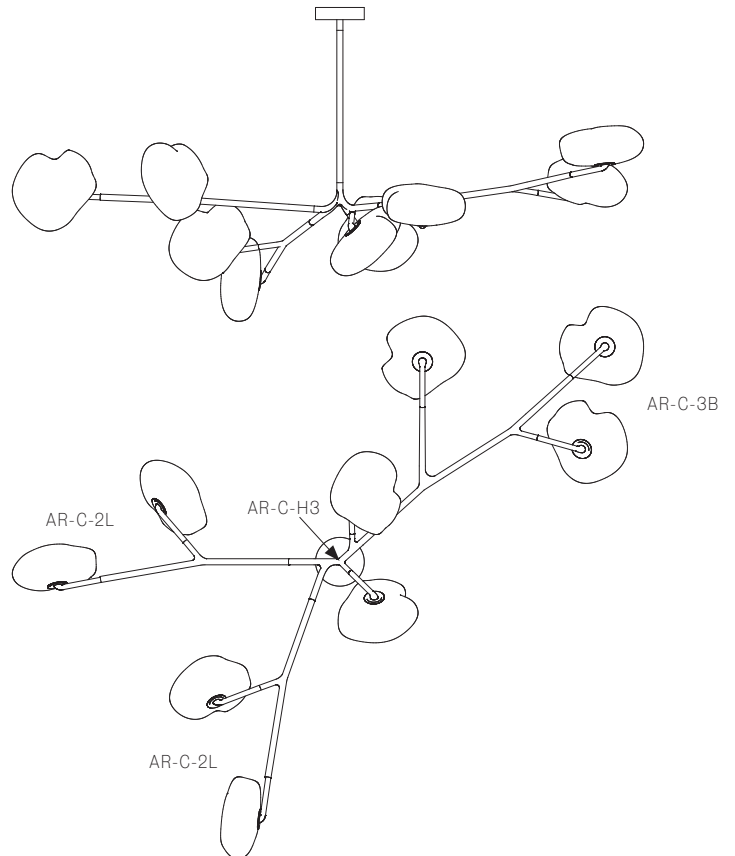


73.9A.2

All dimensions are in millimeters (mm) unless otherwise specified.

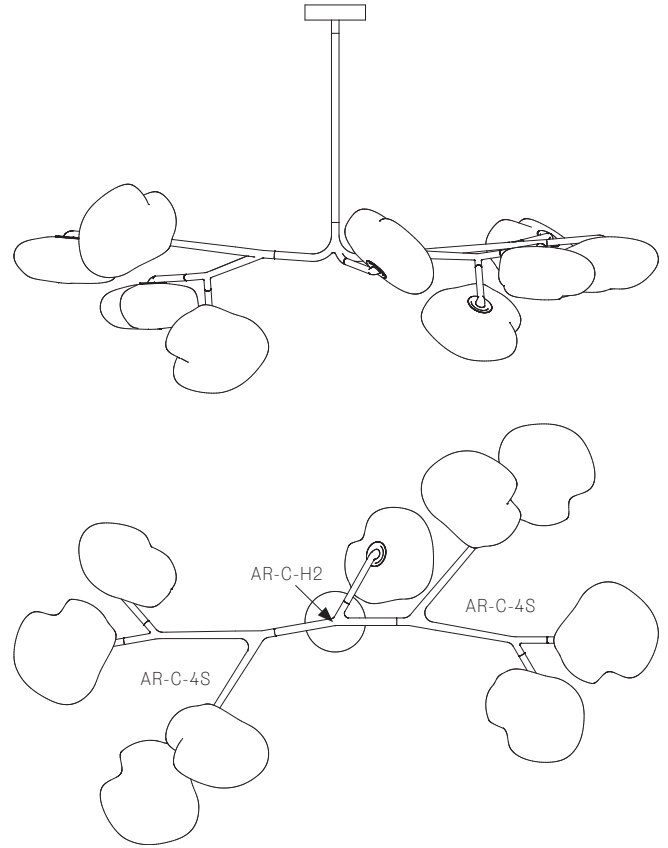
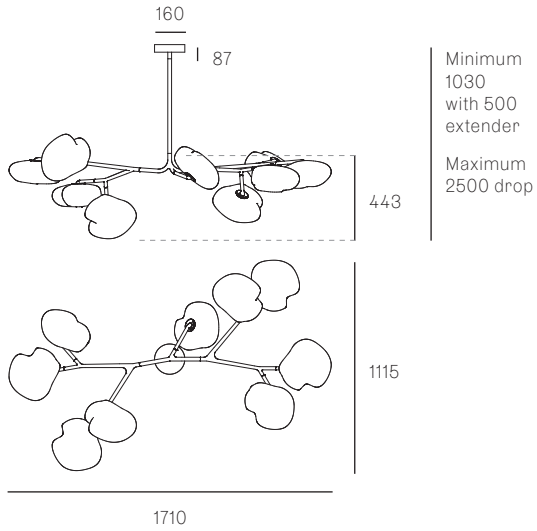


73.11A.1

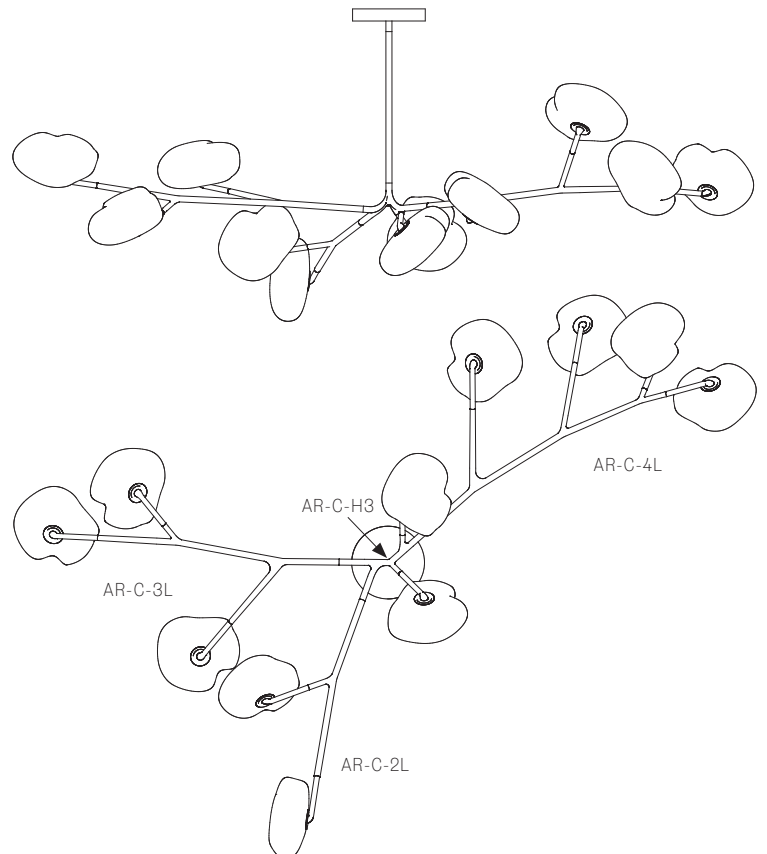
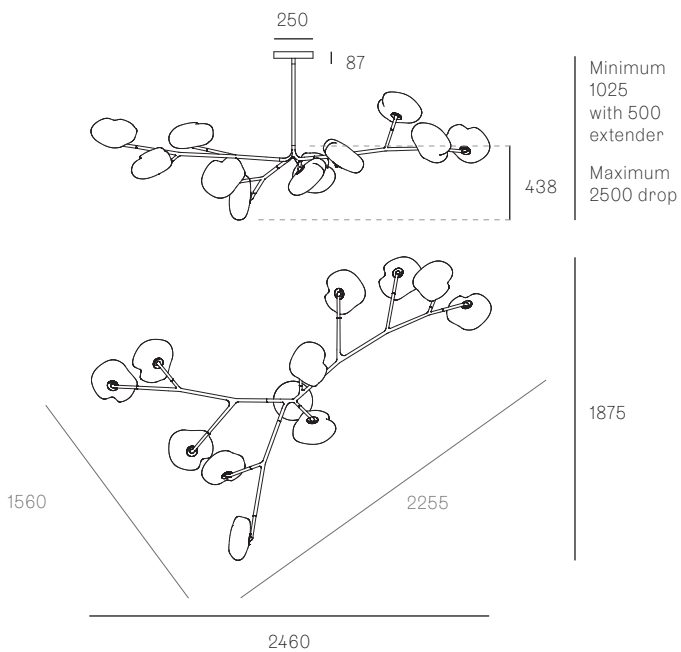


73.11A.2

All dimensions are in millimeters (mm) unless otherwise specified.

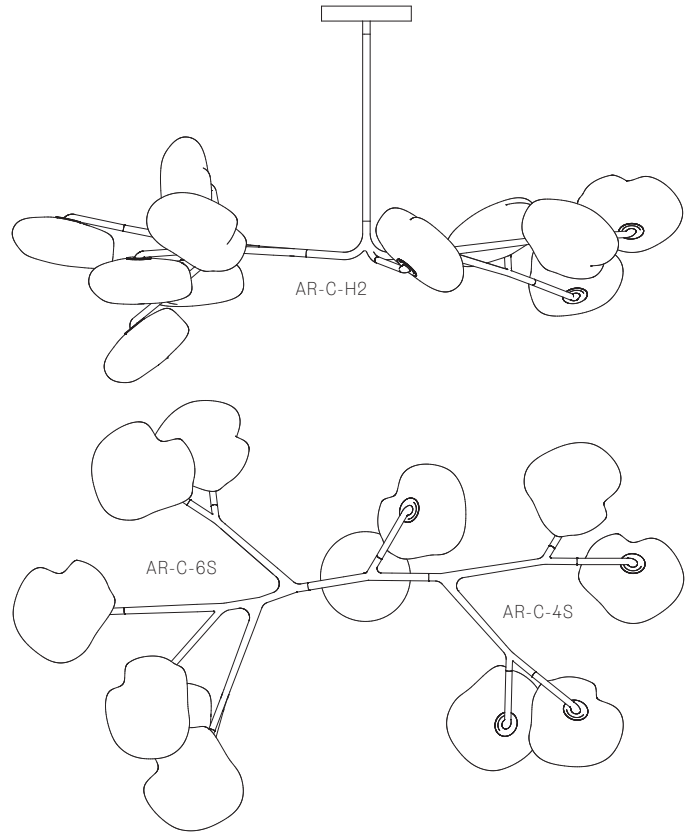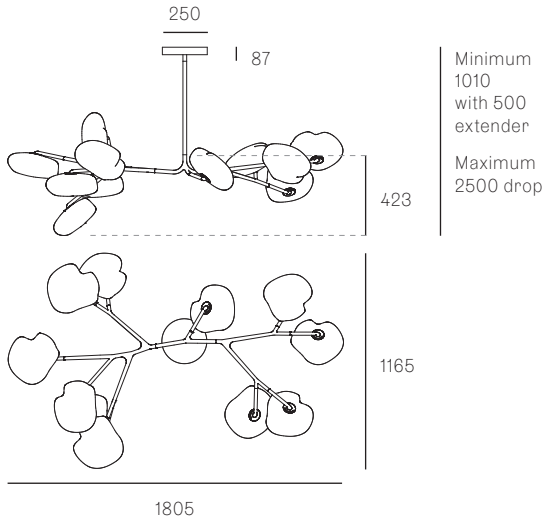


73.13A.1

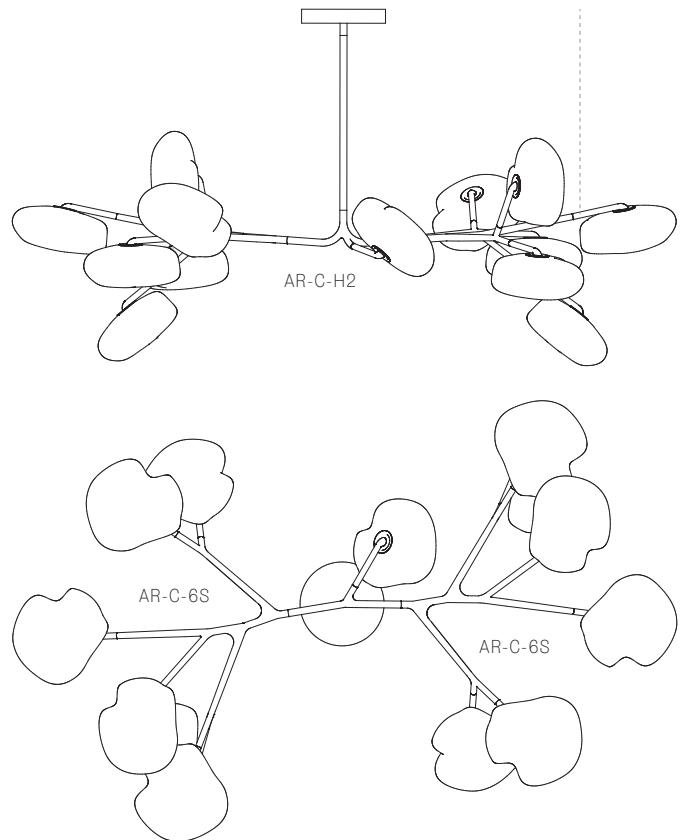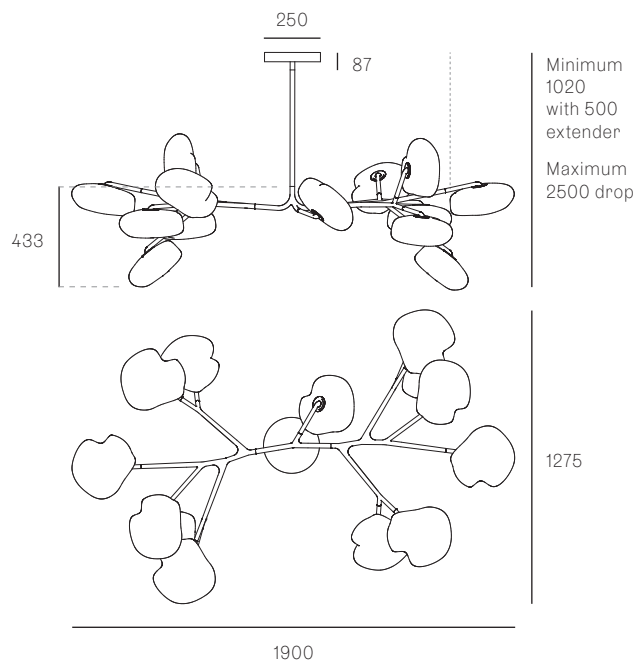


73.17A.1


All dimensions are in millimeters (mm) unless otherwise specified.

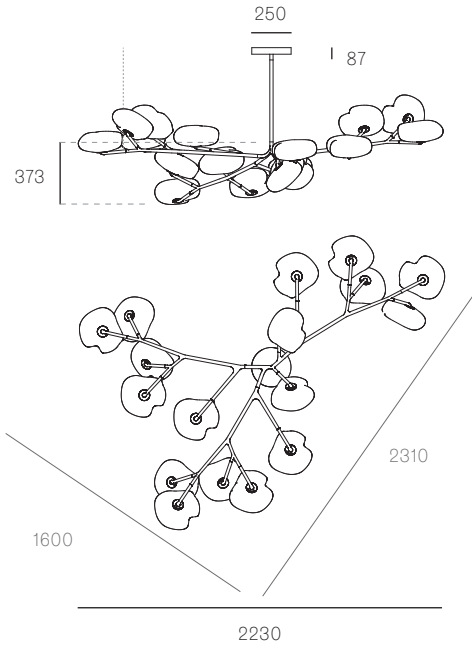


Minimum
960 with
500
extender
Maximum
2500 drop

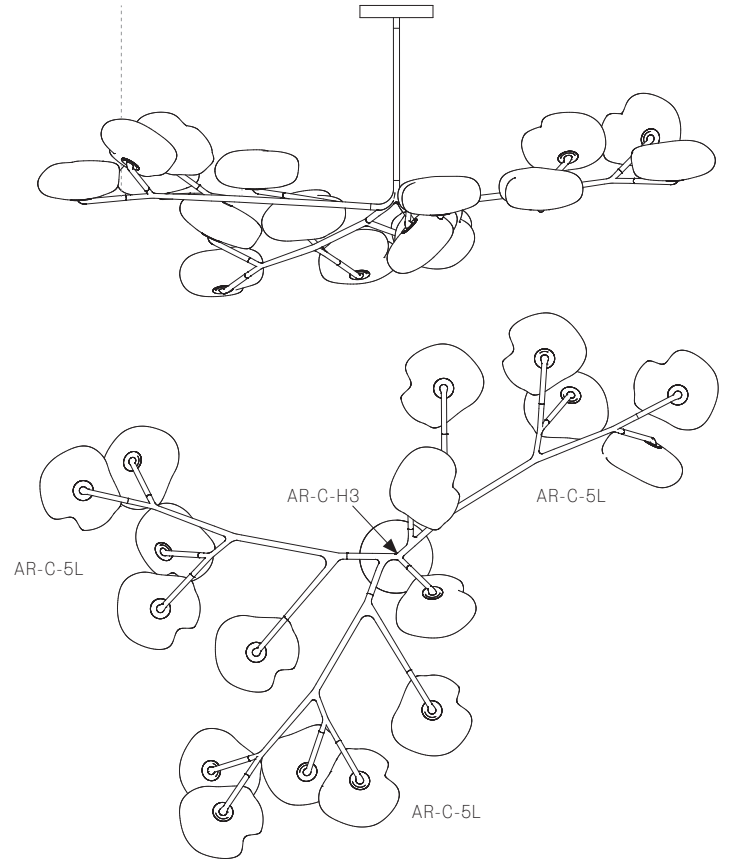

73.21A.1

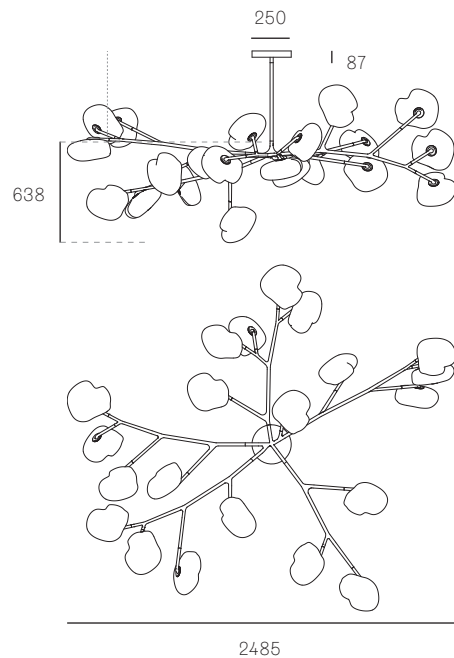


Minimum
1225
with 500
extender
Maximum
2500 drop

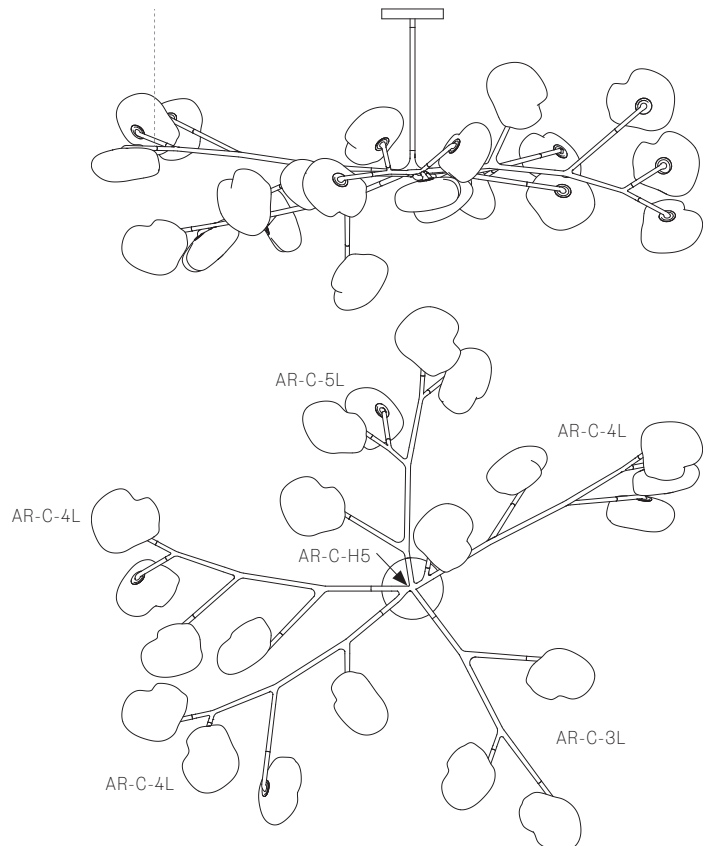

73.26A.1

All dimensions are in millimeters (mm) unless otherwise specified.

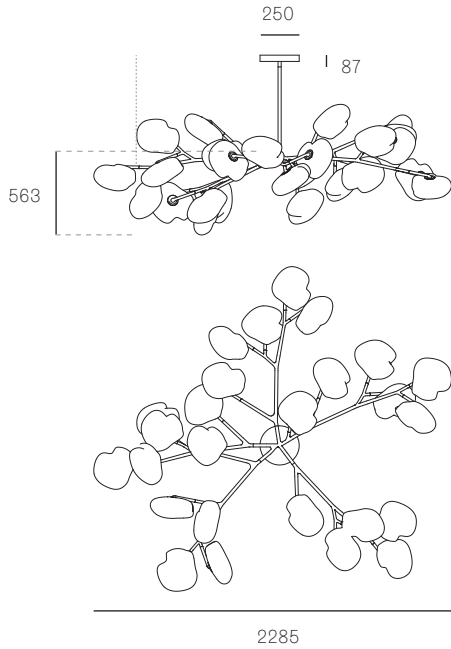

Minimum
1150
with 500
extender

Maximum
2500 drop

2075

