


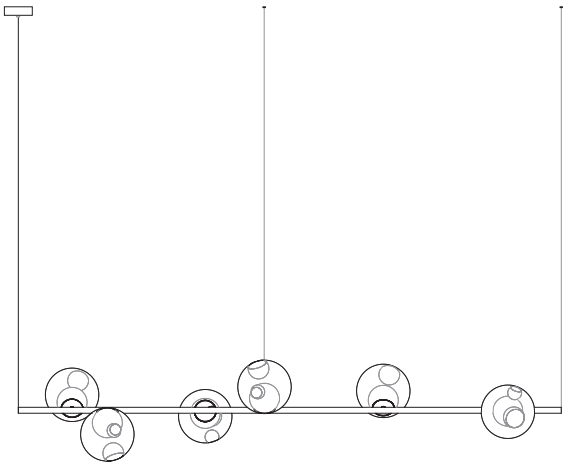


Image shown above 28.6 Horizontal Suspended

Series	28, 38V, 57, 73, 84, 84V, 100, 118
Mounting	Suspended
Glass Colours	28: Clear, colour pendants 38V: Clear 57: Grey, white, light mirror, dark mirror 73: Clear, grey 1, grey 2, grey 3 84: Clear/copper 84V: Clear/copper 100: Clear, grey 118: White, bronze
Lamp	1W LED, 2700K, 100lm (2500K and 3000K options available)
Cable Lengths	3m, 6m, 15m
Finishes	Brass or black powder coated stem Matte black or white canopy
Materials	Blown glass, brass stem, electrical components
Power Supply	Integral Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP20
Note	The brass used in our Stem Series is untreated and, as such, will develop a natural patina over time. To avoid any marking or tarnish on the brass during handling and installation, please use the gloves provided in your shipment. Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	28: US D687,740 EU 001695834-001 to 004 38V: EU 002071019-001 57: US D796732 EU 002268581-0001 to 0006


73: US D762,323 S EU 002633230-0001 - 0003				
84: EU 003611144-0001 to 0004				
100: US D1027 281S EU 008526131-0001				
118: US 12,668,520 Worldwide patents pending				
Certifications	    			
				
Weight (kg)	XXX.3 (900mm)	XXX.3 (1800mm)	XXX.6 (1800mm)	XXX.6 vertical (1800mm)
28	4.7	5.7	9.4	8.2
38V	7.1	8.2	14.3	-
57	5.2	6.3	10.5	-
73	6.2	8.9	15.7	-
84	6.5	7.5	12.9	-
84V	7.4	8.4	14.8	-
100	6.6	8.4	13.2	-
118	7.4	8.5	15	-

28




± Ø157 - 171

38V



± Ø190 - 215

57



± 100 - 150

73



± 120 - 150

± 230 - 380

84



± 130 - 150

± Ø130 - 150


84V



± 75 - 95

± Ø120 - 140


100



± 210 - 170


± 210 - 170

118




± Ø130 - 146

XXX.3




900

XXX.3



1800


XXX.6



1800

adjustable
3000
6000
15000

28.6

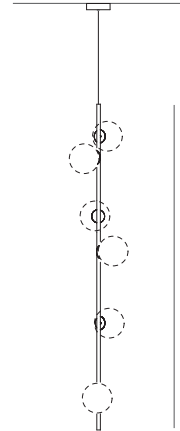

adjustable
3000
6000
15000

1800