

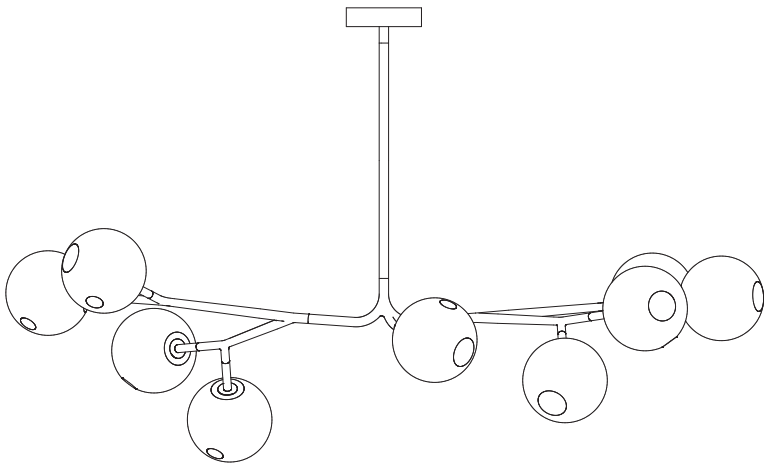


Image shown above 28.9a.2, 500mm extender

± Ø157 - 171mm




|                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mounting       | Ceiling mounted                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Glass Colours  | Clear, various colours                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Lamp           | 1W LED, 2700K, 100lm (2500K and 3000K options available)                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Extenders      | Available in 150mm, 250mm, 500mm, 1200mm.<br>Up to 2500mm drop.                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Finish         | Black powder coated                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Materials      | Blown glass, black powder coated stainless steel armature,<br>electrical components, matte black canopy                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Power Supply   | Integral<br>Bocci recommends remote mounting power supplies for ease of<br>long-term maintenance.                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Environment    | Indoor, dry location. IP20                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Note           | <b>Optional levelling pendant anchor kit included.</b><br><br>Every single Bocci product is handmade. They are blown, poured,<br>carved, polished, packed and dispatched directly by us. As such, no<br>two products are identical; they are individual, irregular expressions<br>of our research.                                                                                                                                                                                                                      |
| Patent #       | CAN 134238<br>US D687,740<br>EU 001695834-001 to 004                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Certifications |       |

| Weight (kg) |      |
|-------------|------|
| 28.5a.1     | 9.4  |
| 28.8a.1     | 14.4 |
| 28.8a.2     | 16.1 |
| 28.9a.1     | 16.5 |
| 28.9a.2     | 14.6 |
| 28.11a.1    | 21.7 |
| 28.11a.2    | 20.3 |
| 28.13a.1    | 23.7 |
| 28.17a.1    | 29.5 |
| 28.21a.1    | 33.8 |
| 28.26a.1    | 37   |




Each product is unique,  
there may be a variance  
in the weight up to 10%.

28.5A.1

All dimensions are in millimeters (mm) unless otherwise specified.

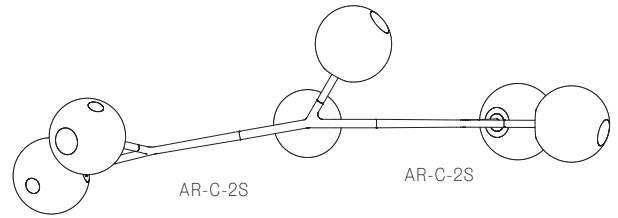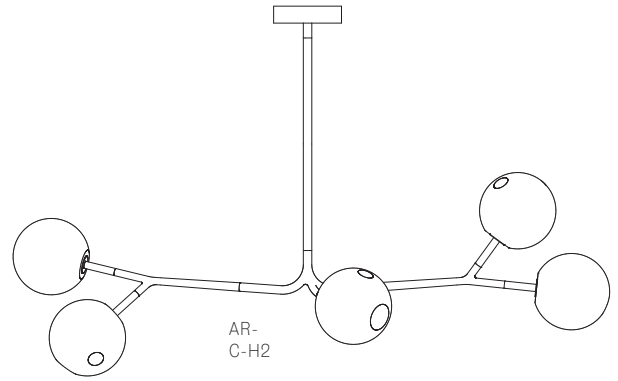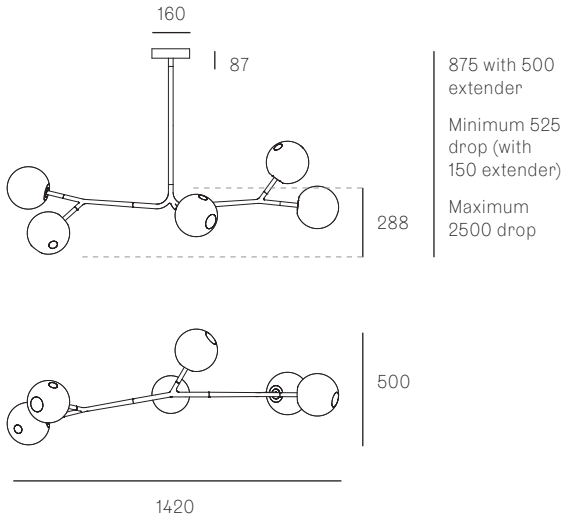


28.8A.1

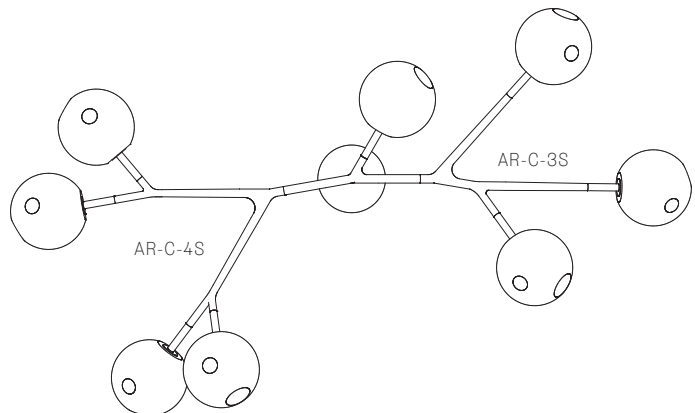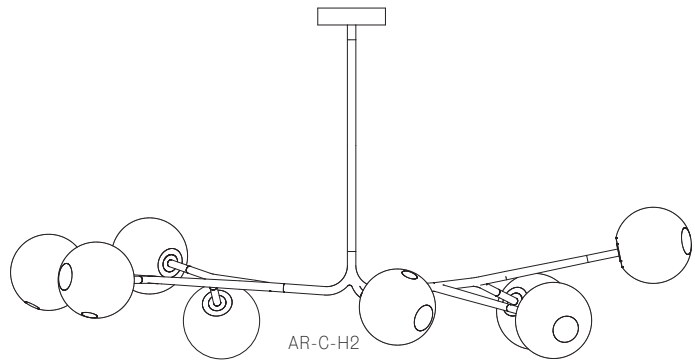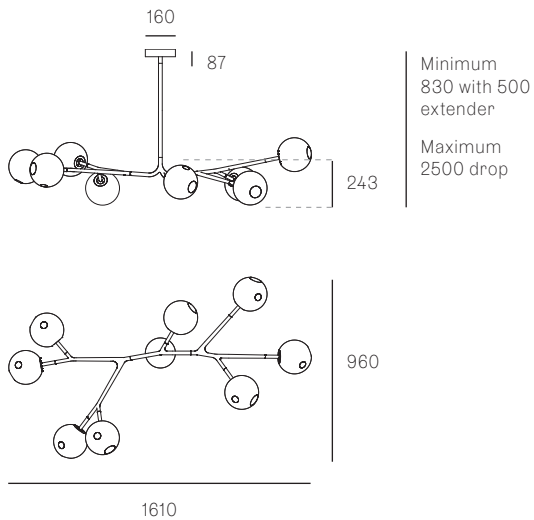


## 28.8A.2


All dimensions are in millimeters (mm) unless otherwise specified.

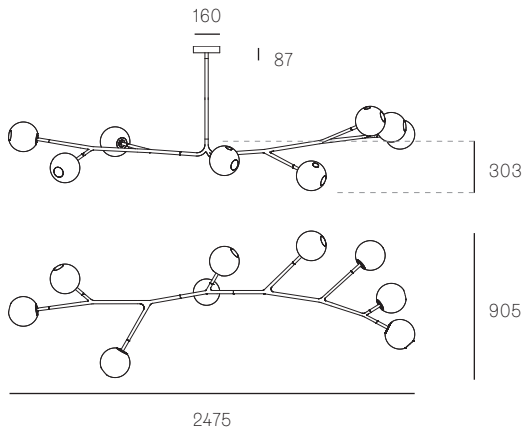


Minimum  
890 with 500  
extender  
Maximum  
2500 drop

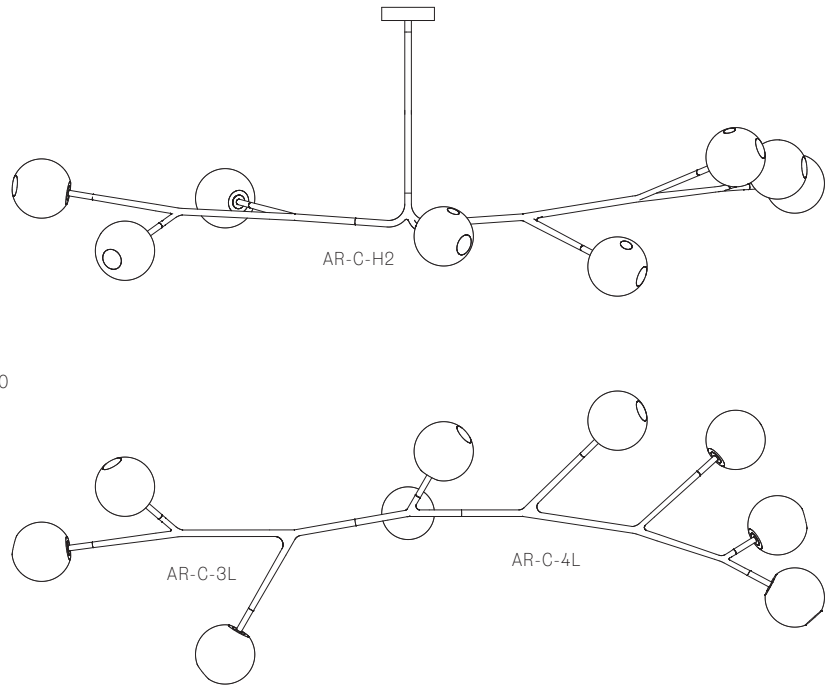

## 28.9A.1




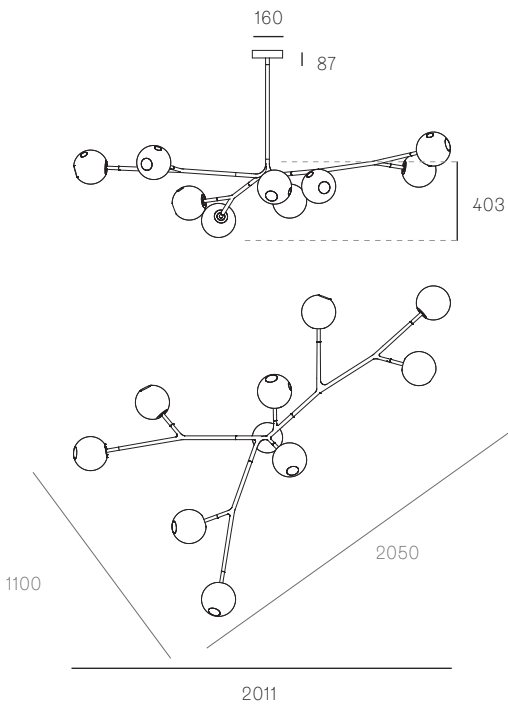


990 with 500  
extender  
Maximum  
2500 drop

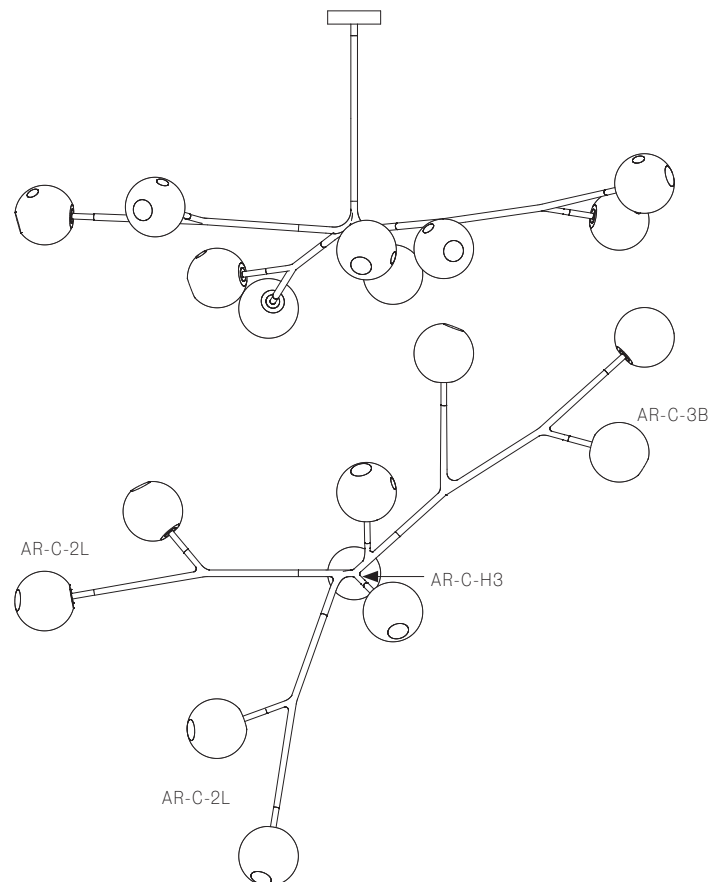




**28.9A.2**

All dimensions are in millimeters (mm) unless otherwise specified.

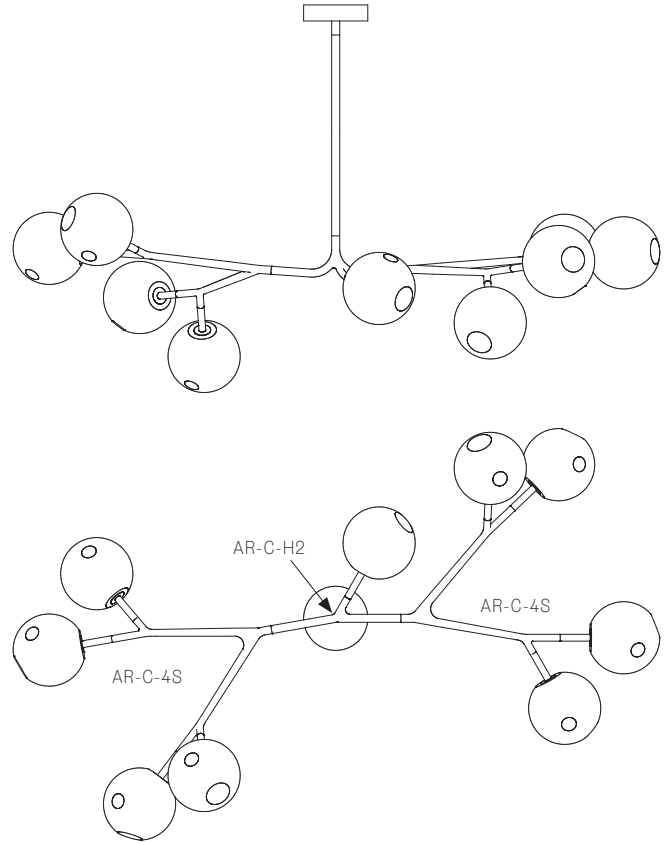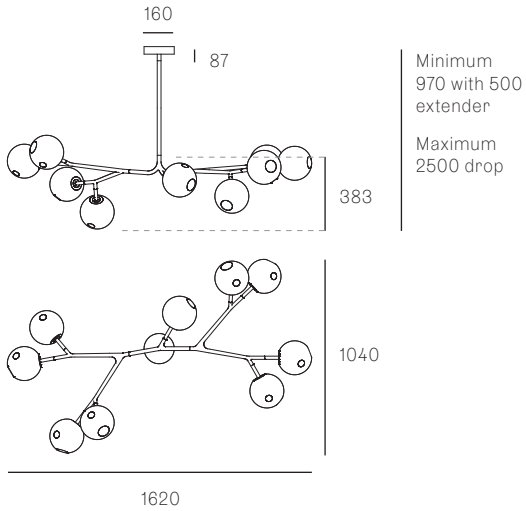
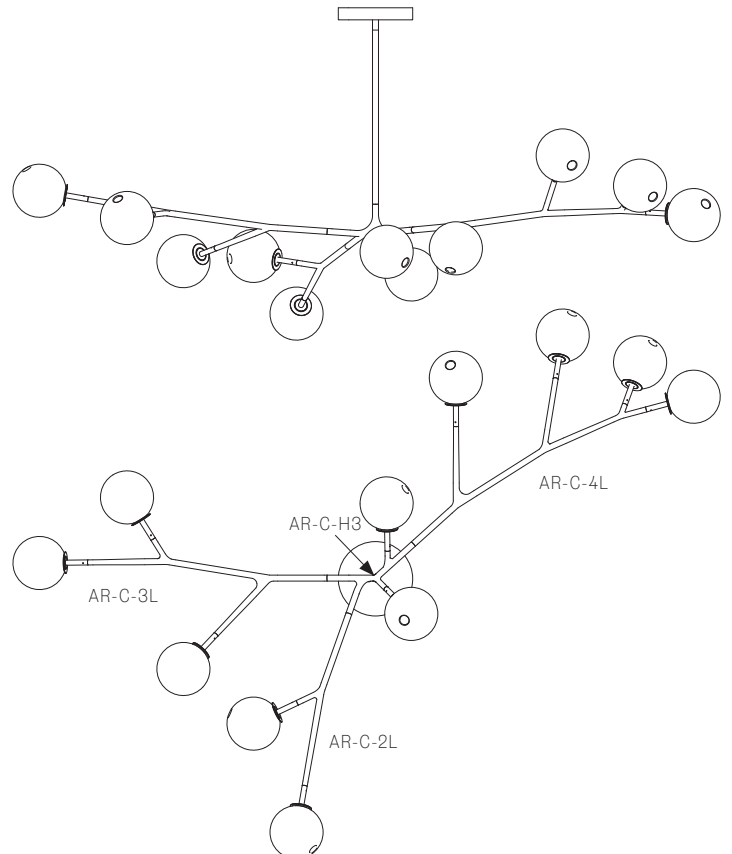
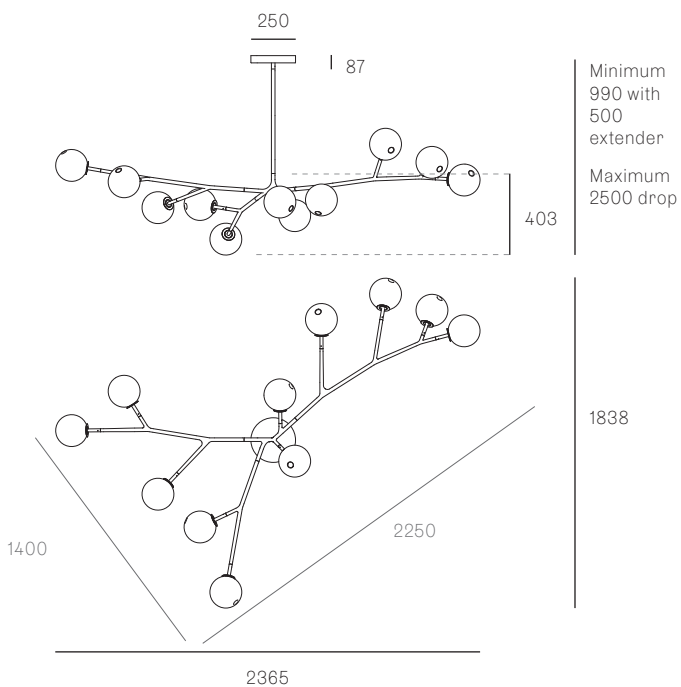
**28.11A.1**

28.11A.2

All dimensions are in millimeters (mm) unless otherwise specified.


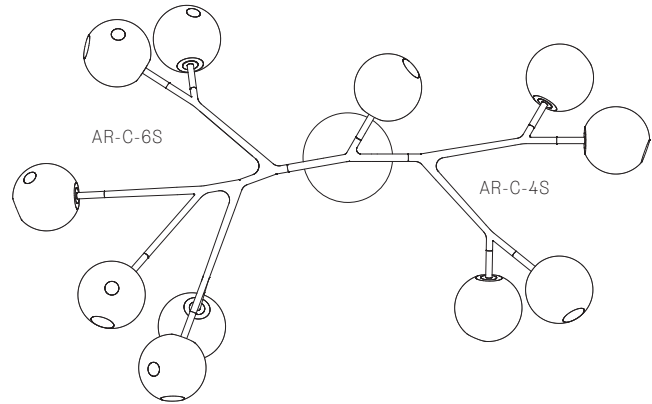
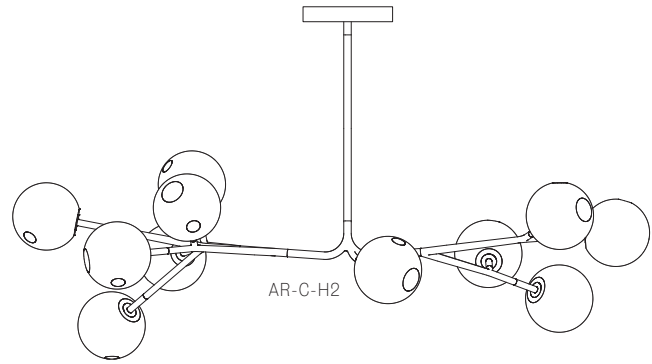
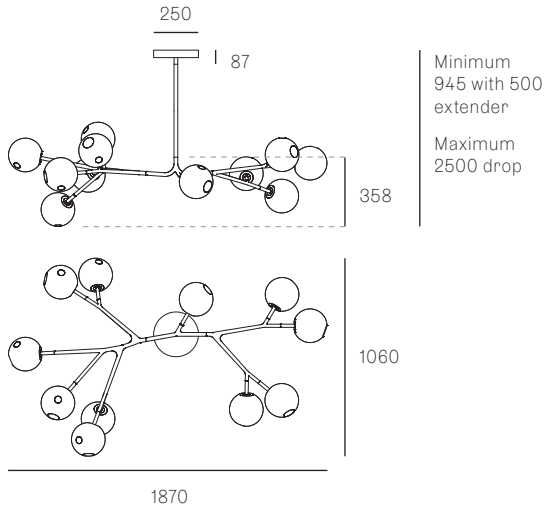


28.13A.1

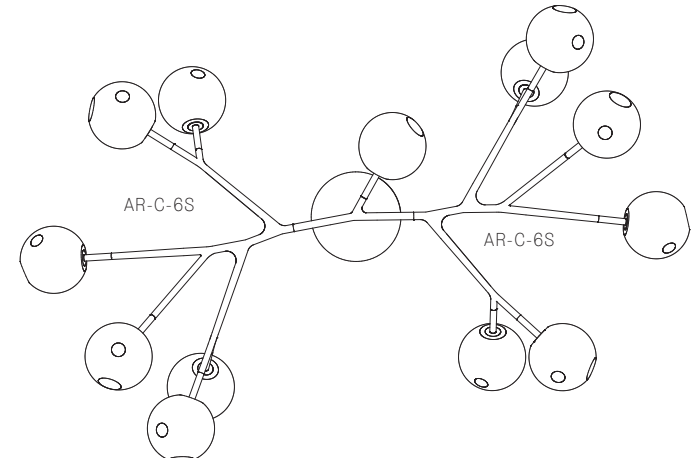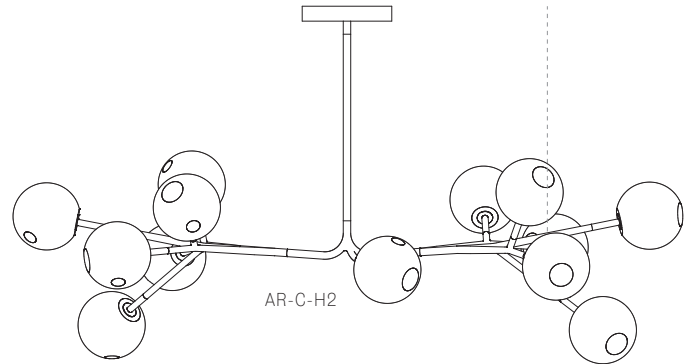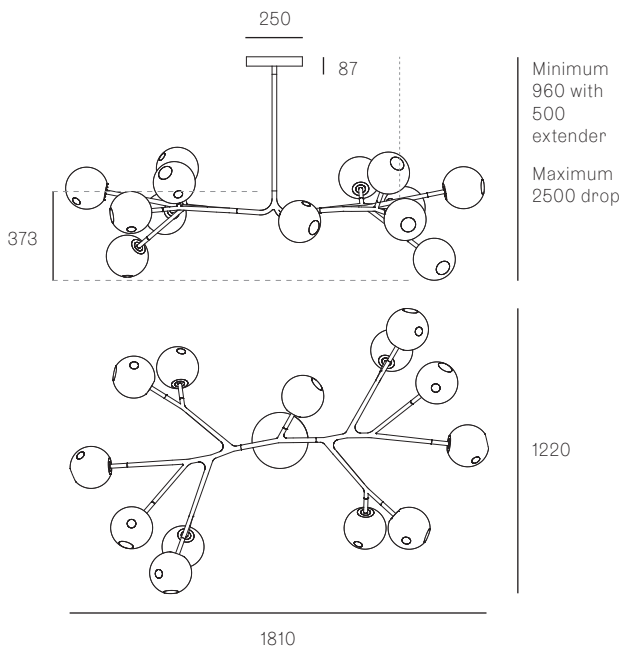


**28.17A.1**

All dimensions are in millimeters (mm) unless otherwise specified.

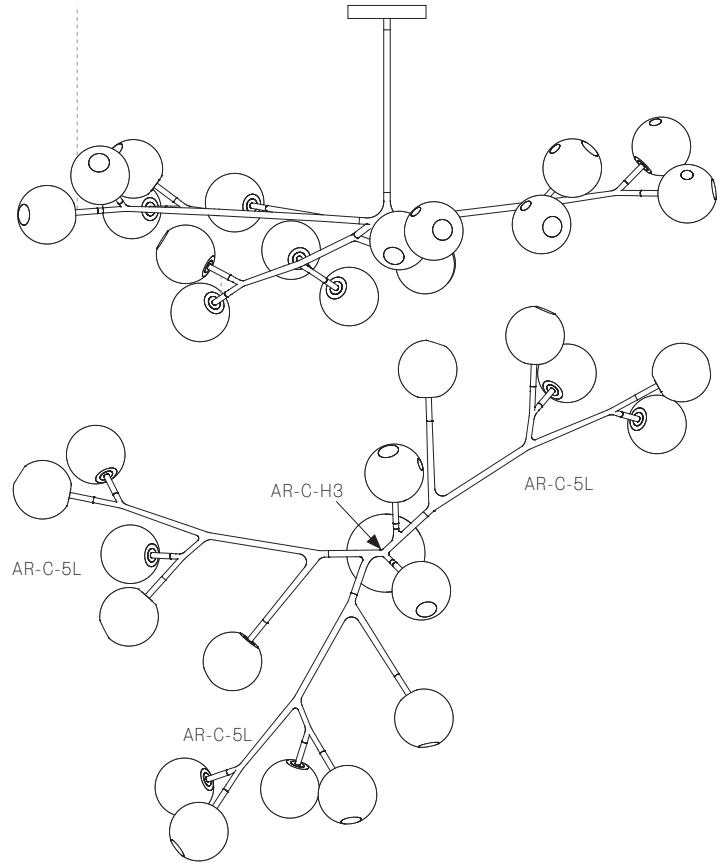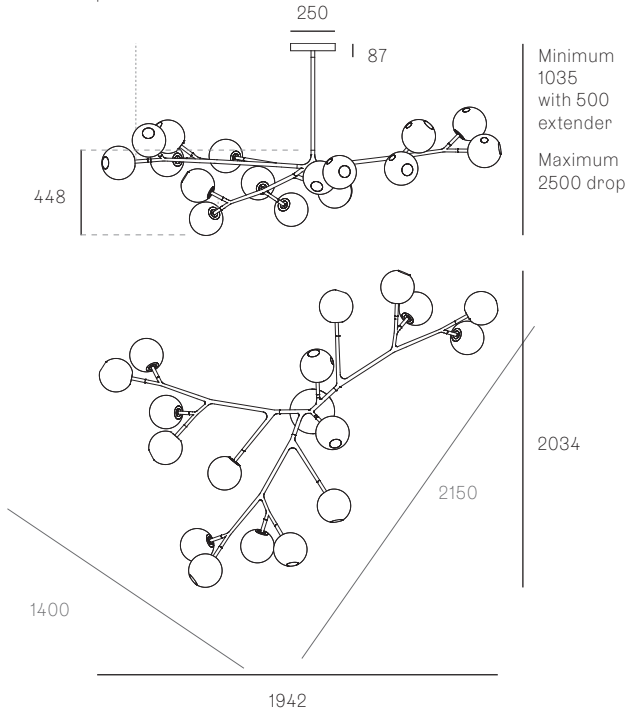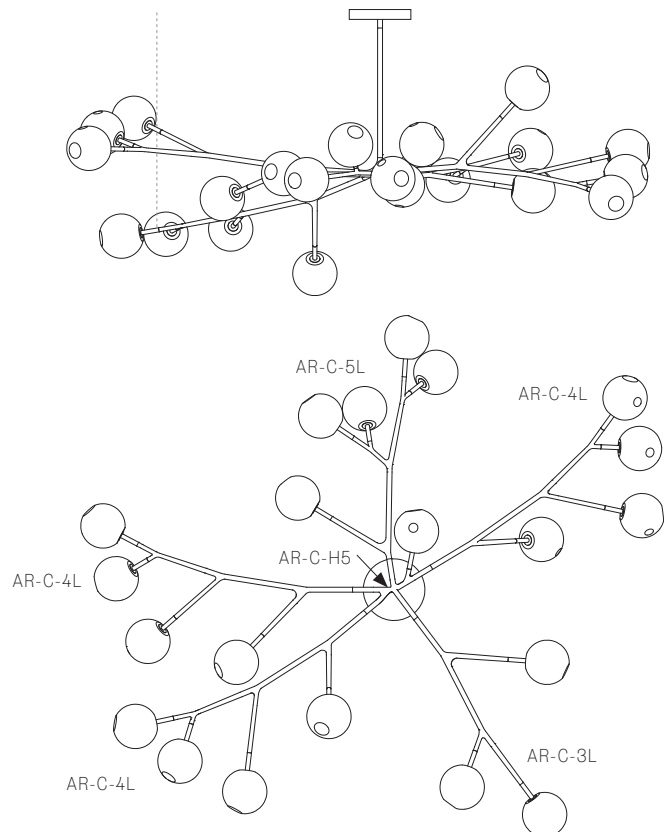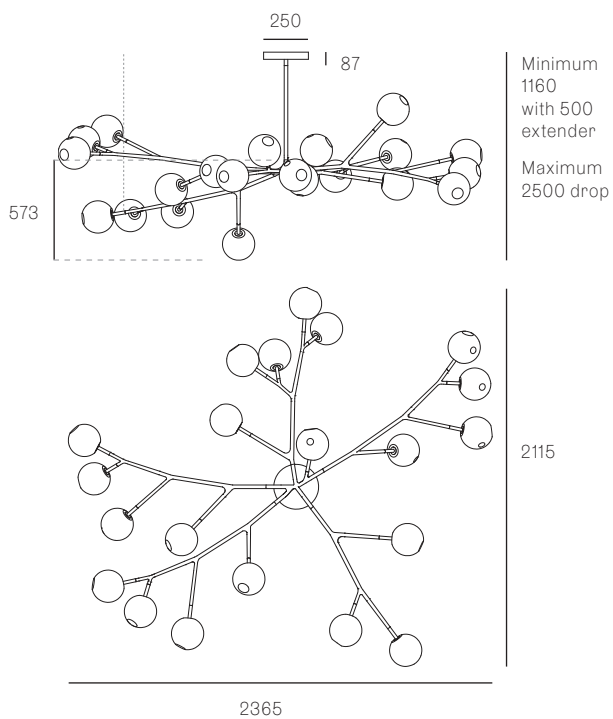**28.21A.1**

28.26A.1

All dimensions are in millimeters (mm) unless otherwise specified.

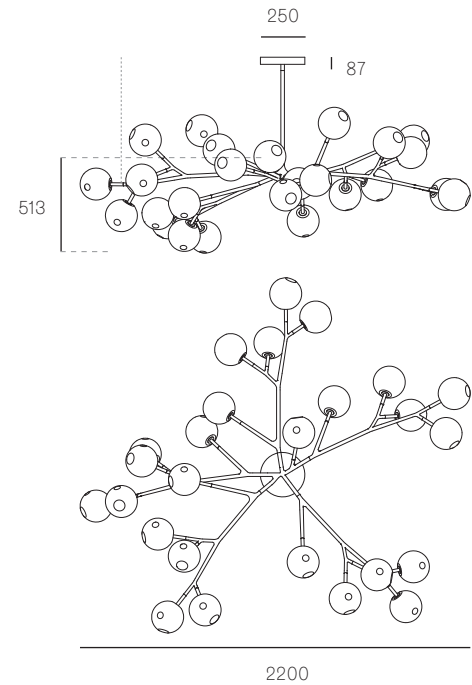

Minimum  
1100  
with 500  
extender  
  
Maximum  
2500 drop

2000

